

5

4

3

2

1

**Material and Finish Codes**

Z1 - CS, HD Galvanized, Chem Treated G90

## REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
1	removed Z2 finish option	12/14/2020	C. Goettl

**Clamping Diameter (D)****Center to Center (L)**

$$\frac{aa}{16}$$

$$\frac{aa + bb + 3}{32}$$

$$\pm .015$$

$$\pm .031$$

Exceptions to the rule for 'L' are:

CD-0407 = .468

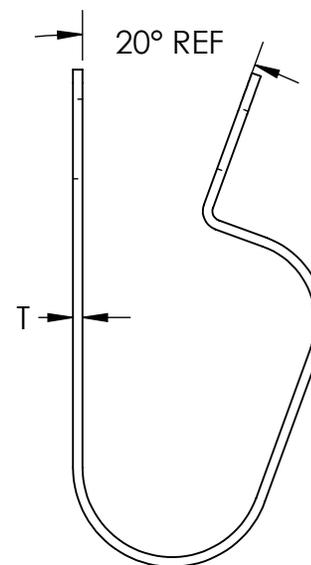
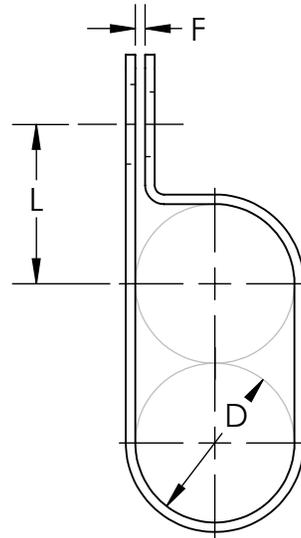
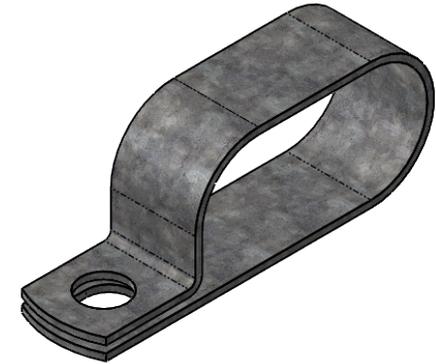
CD-1009 = .718

**Material Thickness (T)**

aa from 03 to 07	aa from 08 to 12	aa from 13 to 16
.032	.048	.060
$\pm .002$		

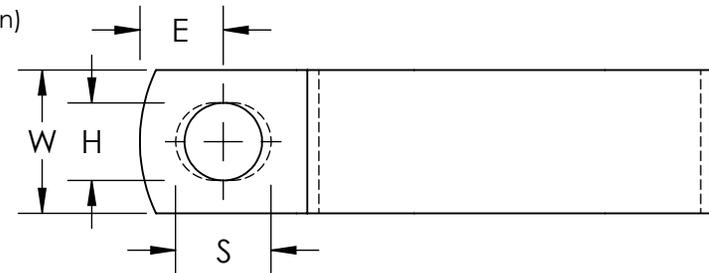
Exceptions to the rule for 'T' are:

CD-0717 = .048

As Supplied  
(Open Position)

Note: CD clamps have a circular hole with diameter H on the top side and a slotted hole with length S, and width H, on the bottom side.

bb	Hole Diameter (H)	Hole Center to End (E)	Width (W)	Slot Length (S)	Gap (F)	
					aa from 03 to 05	aa from 06 to 16
07	.203	.218	.500	.203	N/A	.062
09	.281	.312		.375	.031	
11	.343	.375		.437		
13	.406	.437	.750	.500	N/A	
15	.468	.500	.875	.562		
17	.531	.562	1.000	.625		
	$\pm .005$	$\pm .015$	$\pm .010$		$\pm .031$	

**EXPLANATION OF PART CALLOUT**

CD - aa bb mf

**EXAMPLE OF PART CALLOUT**

CD - 16 13 Z1

This part number indicates the clamp will have dimensions:

Clamping Diameter (D) = 1.000 Hole Center To End (E) = .437  
 Hole Diameter (H) = .406 Gap (F) = .062  
 Center-to-Center (L) = 1.000 Material Thickness (G) = .060  
 Width (W) = .750 Slot Length (S) = .500

Made from CS, Hot Dipped Galvanized,  
Chem Treated G90

**KMC**

THE ORIGINAL CLIP &amp; CLAMP CO.

1221 SOUTH PARK STREET  
PORT WASHINGTON, WI 53074  
(262) 377-5030

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KICKHAEFER MANUFACTURING COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KICKHAEFER MANUFACTURING COMPANY IS PROHIBITED.

PART SERIES  
MASTER PRINT**CD**

DOUBLE TUBE CLAMPS

DRAWN CHECKED

BC

KW

8/22/17

9/11/18

NOT TO SCALE

5

4

3

2

1

A

A

C

C

D

D

B

B