

bb	Width (W)
09	.500
11	.625
13	.750
15	.875
17	1.000
± .010	



Exceptions to the rule for W include:
 CO-0415, CO-0515, and CO-0615 = .750
 CO-0517, CO-0617, and 0717 = .875

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
1	removed Z2 finish option	12/10/2020	C. Goettl


D

D

Clamping Diameter (D)	Center to Center (L)	
	aa from 02 to 32	aa from 33 to 65
$\frac{aa}{16}$	$\frac{aa + bb + 3}{32}$	$\frac{aa + bb + 4}{32}$
± .015	± .031	

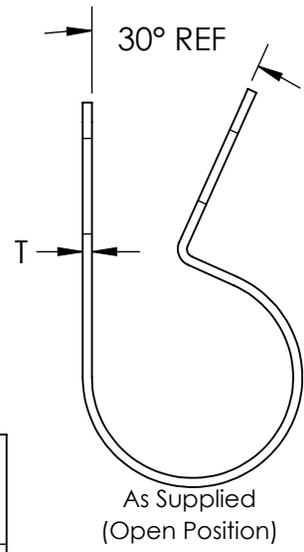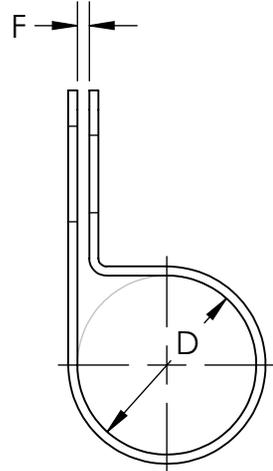

As Supplied (Open Position)

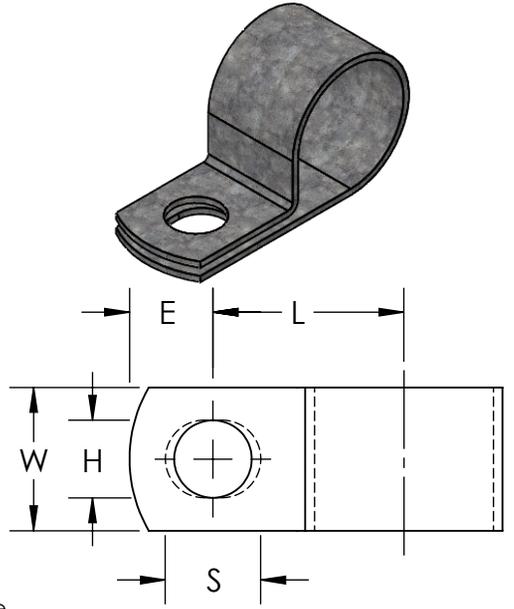

C

C

bb	Hole Diameter (H)	Hole Center to End (E)	Slot Length (S)	Gap (F)		Material Thickness (T)	
				aa from 02 to 06	aa from 07 to 65	aa from 02 to 07	aa from 08 to 65
09	.281	.312	.375	.031	.062	.031	.048
11	.343	.375	.437				
13	.406	.437	.500				
15	.468	.500	.562	N/A	N/A	N/A	
17	.531	.562	.625				
± .005				± .031			

Note: CO clamps have a circular hole with diameter H on the top side and a slotted hole with H width, and length S, on the bottom side.

Material and Finish Codes

- Z1 - CS, HD Galvanized, Chem Treated G90
- AL - 5052 H34 per ASTM B209
- SS - Stainless Steel, Per ASTM A240/A666


B

B

A

A

EXPLANATION OF PART CALLOUT

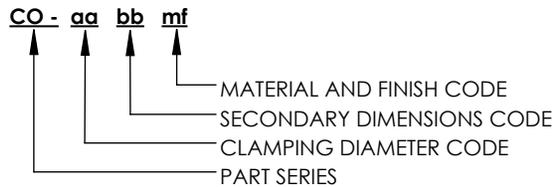

EXAMPLE OF PART CALLOUT

CO - 16 13 Z1
 This part number indicates the clamp will have dimensions:
 Clamping Diameter (D) = 1.000
 Hole Diameter (H) = .406
 Center to Center (L) = 1.375
 Width (W) = .750
 Hole Center to End (E) = .437
 Gap (F) = .062
 Material Thickness (G) = .048
 Slot Length (S) = .500
 Made from CS, Hot Dipped Galvanized, Chem Treated G90



1221 SOUTH PARK STREET
 PORT WASHINGTON, WI 53074
 (262) 377-5030

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KICKHAEFER MANUFACTURING COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KICKHAEFER MANUFACTURING COMPANY IS PROHIBITED.

PART SERIES MASTER PRINT

CO
 WIRING AND TUBE CLAMPS

DRAWN	CHECKED
BC	KW
8/22/17	11/20/18

NOT TO SCALE