

5

4

3



2

1

bb	Width (W)
09	.500
11	.625
13	.750
15	.875
17	1.000
$\pm .010$	


Exceptions to the rule for W include:
 COV-0415, COV-0515,
 and COV-0615 = .750
 COV-0517, COV-0617,
 and COV-0717 = .875

Clamping Diameter (D)	Center to Center (L)	
	aa from 04 to 32	aa from 33 to 65
$aa - 1$ 16	$aa + bb + 3$ 32	$aa + bb + 4$ 32
$\pm .031$		$\pm .031$

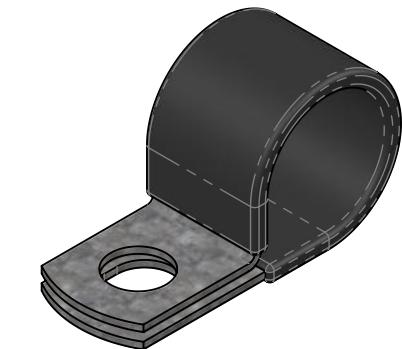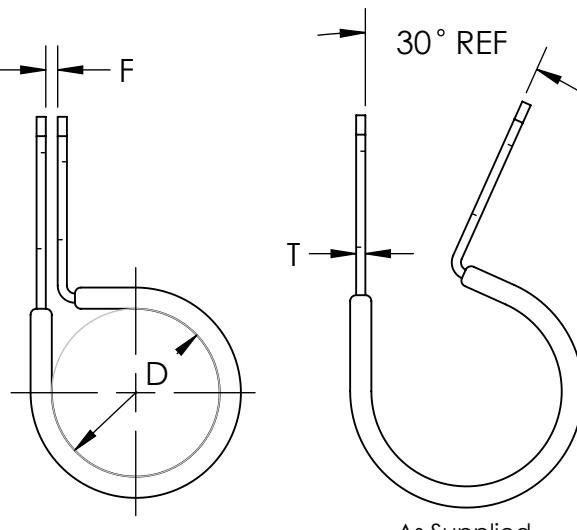

bb	Hole Diameter (H)	Hole Center to End (E)	Slot Length (S)	Gap (F)		Material Thickness (T)
				aa from 04 to 06	aa from 07 to 65	
09	.281	.312	.375	.031		.032
11	.343	.375	.437		.062	.048
13	.406	.437	.500			
15	.468	.500	.562	N/A		
17	.531	.562	.625		N/A	
$\pm .005$		$\pm .015$	$\pm .020$	$\pm .031$		

EXPLANATION OF PART CALLOUT

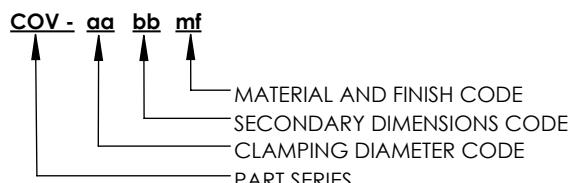

EXAMPLE OF PART CALLOUT

COV - 16 13 Z1

This part number indicates the clamp will have dimensions:

Clamping Diameter (D) = .937

Hole Diameter (H) = .406

Center to Center (L) = 1.000

Width (W) = .750

Hole Center to End (E) = .437


Gap (F) = .062

Material Thickness (G) = .048

Slot Length (S) = .500

Made from CS, Hot Dipped Galvanized, Chem Treated G90

Note: COV clamps have a circular hole with diameter H on the top side and a slotted hole with H width, and length S, on the bottom side.

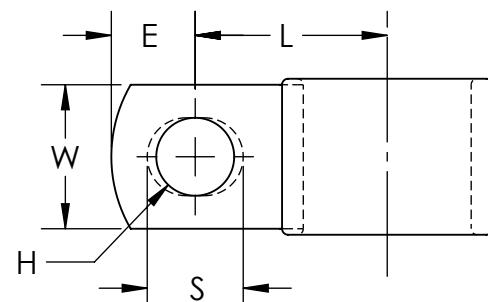

Material and Finish Codes

Z1 - CS, HD Galvanized, Chem Treated G90

Z2 - CS, .0002 min Zinc, Clear

Cushion is Black Vinyl, 1/32"

KMCTM

THE ORIGINAL CLIP & CLAMP CO.

1221 SOUTH PARK STREET

PORT WASHINGTON, WI 53074

(262) 377-5030

PART SERIES
MASTER PRINT

COV

COATED WIRING
AND TUBE CLAMPS

DRAWN	CHECKED
BC	KW
8/22/17	9/11/18
NOT TO SCALE	

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KICKHAEFER MANUFACTURING COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KICKHAEFER MANUFACTURING COMPANY IS PROHIBITED.

5

4

3

2

1

A

D

C

B

A